
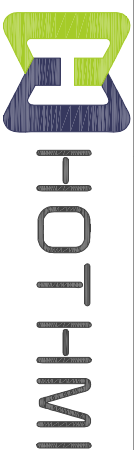
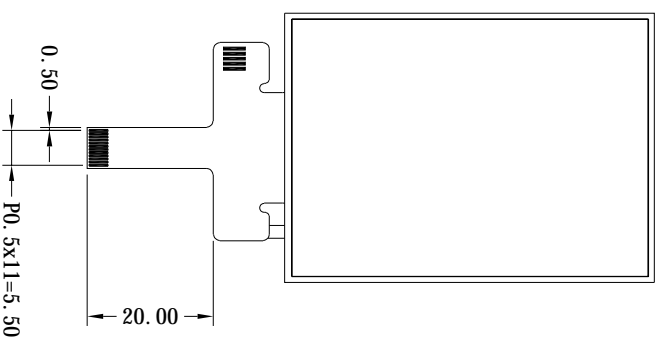
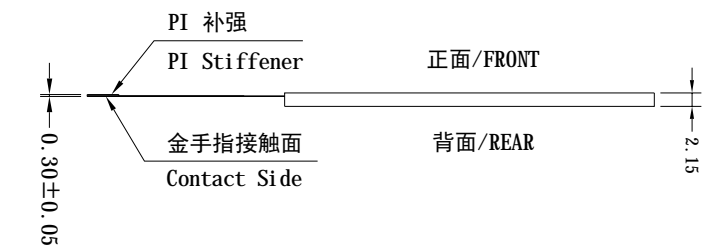


***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
 ***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

字体：黑体
bold (typeface)

TFT Pin_SIGNAL	TP Pin_SIGNAL
1	GND
2	NC
3	NC
4	NC
5	NC
6	VCI
7	RESX
8	CS
9	SCL
10	D/CX
11	SDA
12	LEDA

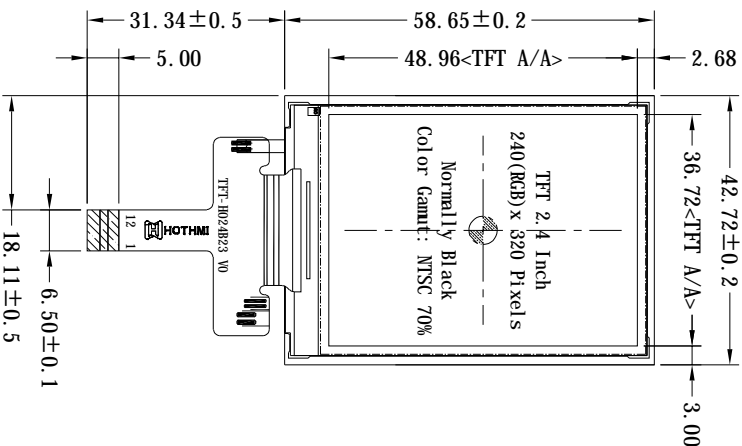

产品型号
TFT-H024B23QVI1STAN12

比例 1:1
 设计制图 Liu_YL
 日期 2024-10-12

版本 V0-0
 单位 MM
 公差 ±0.3

观看方向/角度 Viewing Direction	U85/D85/885/L85 (Typ.)	TFT 工作温度 TFT Operating Temp	-30 °C ~ +80 °C
接口 Interface	4-line 8bit serial I/F	TFT 储存温度 TFT Storage Temp	-30 °C ~ +80 °C
工作电压 Operating Voltage	VCI=3.0~3.3V	背光驱动条件 Backlight conditions	Vf= 3.0 ~ 3.4V/If= 80 mA
驱动芯片 Driver IC	ST7789<TFT>	液晶模组亮度 LCM Brightness	400 cd/m ² (Typ)/固定电流测试